LEXCRU









INDEX







Mobile Applications



100% Food Grade, ABS Plastic



Auto TDS Control



5 Titanium Plates Platinum Coated



Storage : 10Ltr. Antibacterial Tank



1. Table Top 2. Wall Mounting



Purification Capacity 15 Ltr/ Hr.

ANTIOXIDANT



ANTI AGING

CURE ALL DISEASES REPAIR CELL

RICH ANTI OXIDANT

ENERGETIC BODY-



Antioxidant - ORP



Oxidant + ORP

FAST AGING

DISEASE, DAMAGE ALL ORGAN-CELL


FREE RADICALS OXIDANT

LESS ENERGY / TIREDNESS

Oxidation = Sickness = Aging




ALKALINE WATER

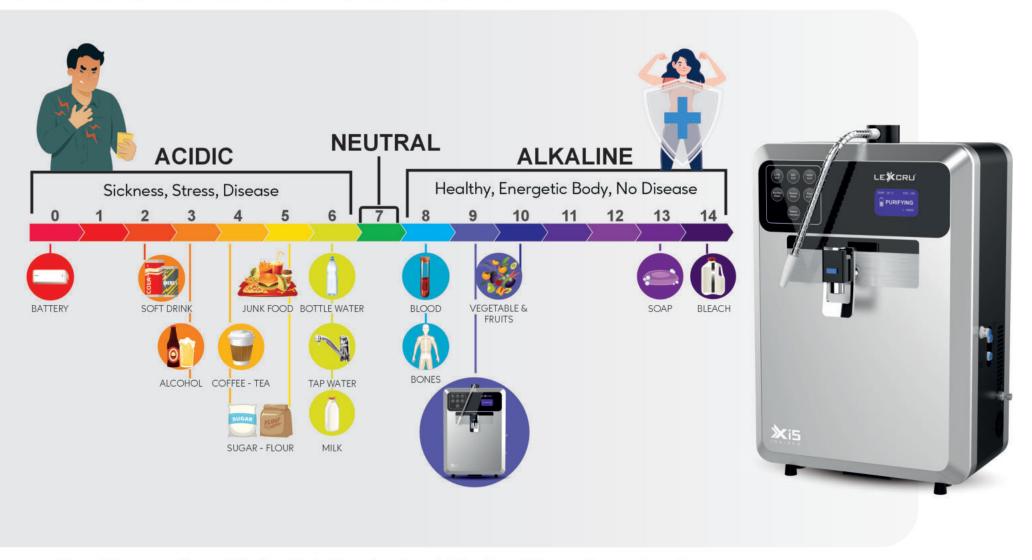




BENEFITS

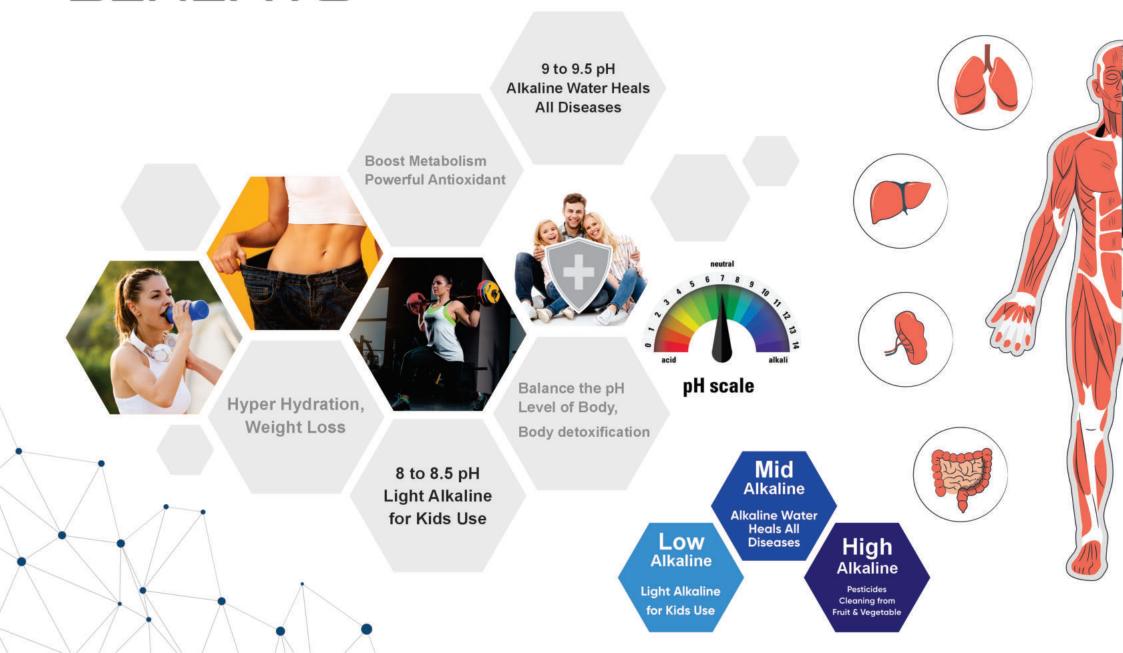








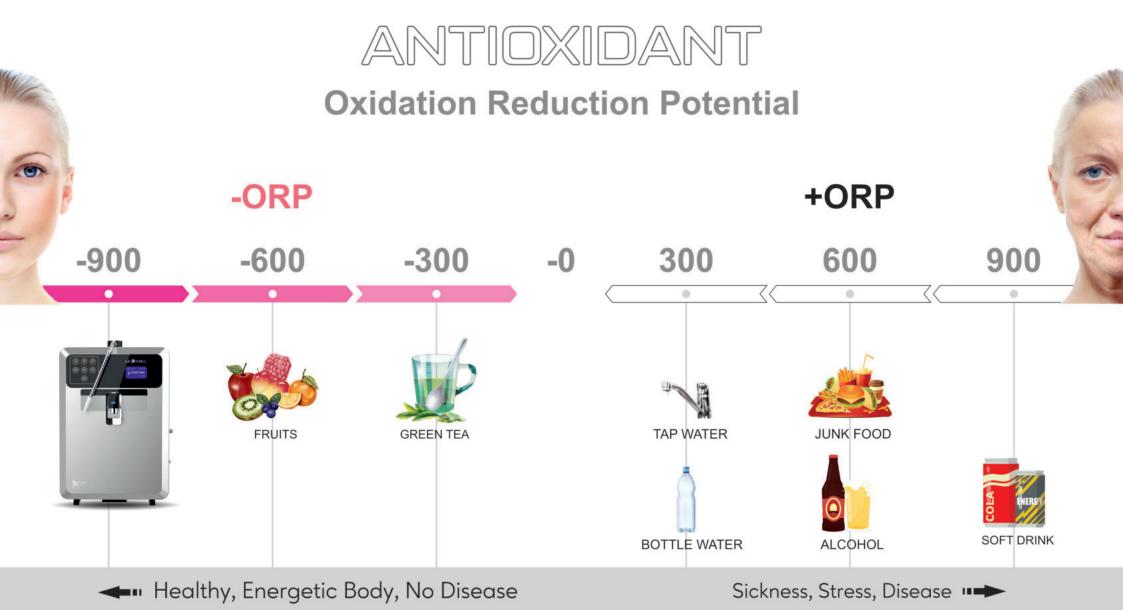



MICRO CLUSTER

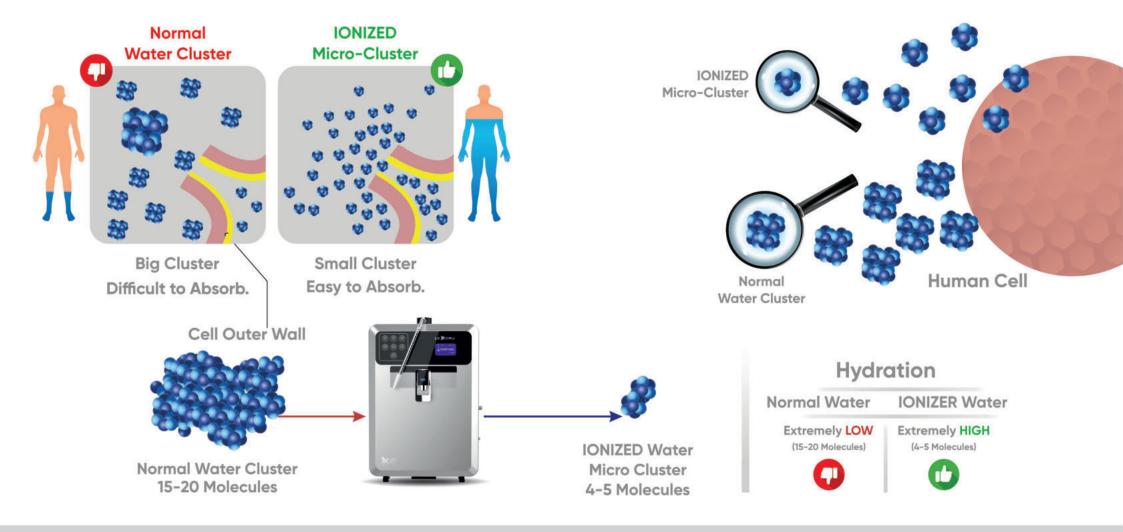

MORE HYDRATION FOR THE CELLS - PREVENT PREMATURE AGING - WEIGHT MANAGEMENT



IONIZER VALVE

BUTTON WITH LED DISPLAY

PREMIUM QUALITY TAPE

MODEL & SPECIFICATION



Usage	For Household purpose only
Colour	Black and Gray
Purifier Type	RO + UV + UF Ionization
Number of Plates	5 Titanium Plates with Platinum Coating
Storage Tank	10 Liters
Alkaline pH Range	8 to 11 pH
Acidic pH Range	3 to 6 pH
Select pH Range	Low Alkaline – between 8-9 pH
	Mid Alkaline – between 9 – 10 pH
	High Alkaline – between 10-11 pH
	Beauty Water – between 5 to 6 pH
	High Acidic – between 3 to 4 pH
	Purified Water – 7 pH
ORP Levels	Upto -750
ORP at 9.0 pH	Upto -550
Hydrogen Generation Technology	Upto 1600 ppb
Smart Automatic Cleaning	Auto Cleaning after every 10 Liters
Pop-Up	Cleaning Process displays on LSD Screen
Automatic pH Controller	From 60 – 250 TDS – Machine
As per Input TDS	maintain pH Result Automatically
Automatic pH Controller	From 0.8 – 2.0 lpm – Machine
As per Input Flow	maintain pH Result Automatically
Alkaline – Acid Water Ration	70-30
Parts Warranty	2 Years + Parts Repair Service (Chargeable)
Cell Warranty	3 Years
Electrode Plates	Solid Titanium Plates with Platinum Coating
	(99.9% purity)
Display	Button with LED 3.5 inch GLCD Screen

UF Membrane		10 Inches
Active Carbon Filters		1100 IV
R0 Membrane		0.0001 Micron
UV Inside the Tank		Japanese LED UV 5W
Plates Size		75 sq inches
Dimensions		Depth 10.6", Height 22", Width 14.3" inches
		(Approximately)
Weight		10.5 kg
Inlet Water Source		Raw Water upto 2000 TDS
Inlet Pressure		0.5 - 2 kg/cm2
Inlet Water Temperature		Max 45
Inlet Connector		1/2" ×1/4" Inches
Installation Type		Wall Mounting & Table Top
Operating Voltage		230 Volt (AC)
Power Consumption		RO – 30W, lonizer – 150W
Smart Switch Mode Powe	er Supply	Yes
Certifications		WQA, ISO 9001-14001, CE, FDA, MSME, ROHS,
		Technology Patent – All Own By Lexcru Ionizer
Make In India		Yes
Laboratory Testing		Yes
Manufacturing Quality As per ISO 9001-14001		Yes







LEXCRU IONIZER COMPANY

Shed No.75, Haridham Industrial Estate, Odhav, Ahmedabad, Gujarat - 382415, INDIA.

Marketed by:

LEXCRU WATER TECH PVT. LTD.

D-601/602, Six Floor, Saral Icon, Near. Hotel Flora, Opp. Reliance Petrol Pump, S. P. Ring Road, Vastral, Ahmedabad, Gujarat - 302418, INDIA. Email: sales@lexcru.com | Web: www.lexcru.com





